




DH3000- SOLAR DEHUMIDIFIER

DEHUMIDIFIER SPECIFICATIONS


The DH3000 will operate with any hot water source. The unit can be installed as shown in a “stand alone” configuration where filtered return air comes from the space to the unit and dry supply air registers that “Y” off the main supply air duct.

Reactivation air is typically attic air that is pulled through the moisture from the desiccant wheel through the exhaust vent.


As an option, the DH3000 can be ducted into the existing air handling system to utilize the existing duct work for dry air distribution throughout the home. Consult the operating and installation manual for details.

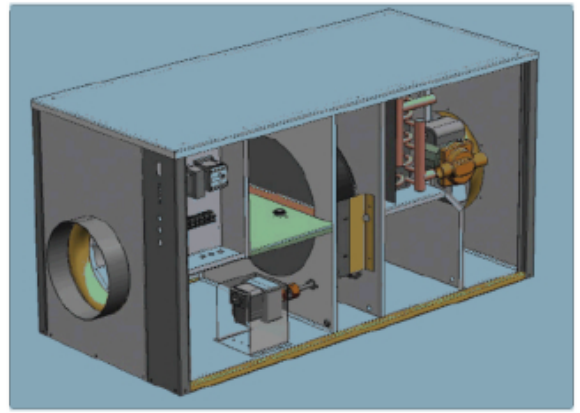

DH3000 Solar Dehumidifier

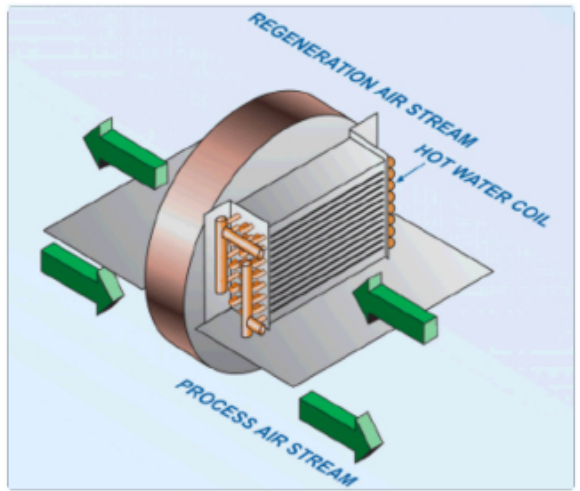

How it works

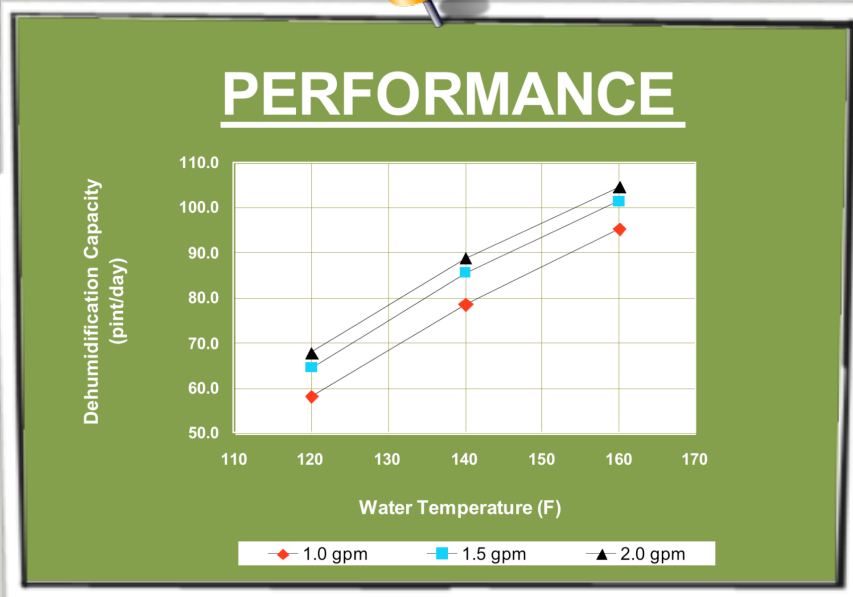

For further information, please consult SolarUS's DH3000 Installation Manual.

