

Apollo2 Energy Monitor

INCLUDED

- ☒ 1 Apollo2 Device
- ☒ 1 Ethernet Cable
- ☒ 1 Inverter Cable
- ☒ 2 A/C Load (CT1 & CT2)
- ☒ 2 Grundfos® VFS Series Flow Sensor Cables
- ☒ 1 Six-Sensor Temperature Cable
- ☒ 1 Pressure Switch Cable
- ☒ 1 A/C Adapter (universal input, US plug)
- ☒ Quick Start Guides

OPTIONAL ACCESSORIES

- ☒ Communication Package including Power Line Carrier (PLC) network bridge
- ☒ Pressure Switch

SPECIFICATIONS

Input Power:

- 5VDC, 1A

AC Adapter:

- 100-240VAC 50/60Hz
- UL/CE/CUL/C-Tick/TUV
- US 2-prong (others available)

Physical Dimensions:

- 5.5 x 4 x 1.4in
- (139.7 x 101.6 x 35.6mm)

Weight

- 2.1lbs (0.95kg) with cables

Housing Material:

- Flame retardant ABS plastic

Housing Rating:

- UL 94-5VA

Regulatory:


- FCC-15 Class B
- CE Mark
- C-Tick

Operating Temperature

- 0-55°C (32-131°F)

Cable Lengths:

- 14' Ethernet Cable
- 14' Inverter Cable
- 5' A/C Load Cables (CT1 & CT2)
- 13' Temperature Sensor Cable
- 4' Pressure Switch Cable
- 6' A/C Adapter

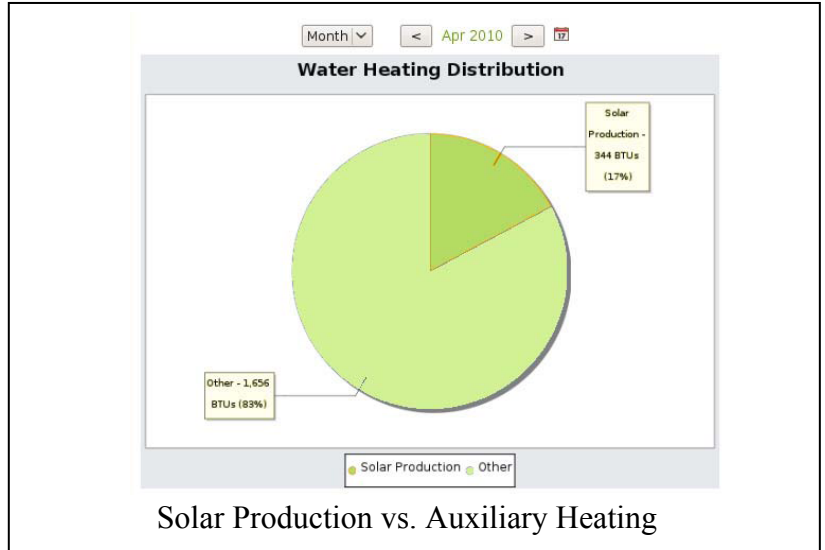

Product Feature Comparison

Feature	Apollo1 (Residential)	Apollo2 (Commercial)
Modular Sensors	X	X
Thermal Monitoring	X	X
PV Monitoring	X	X
Internet Connectivity	X	X
Pump On/Off Detect (AC Detect)	X	X
DHCP Network Support	X	X
Pressure Switch Compatible	X	X
Local LED Indicators	X	X
Wall Mount	X	X
Flow Meter Compatible	One	Two
3-Loop Thermal Monitoring		X
Double Thermal Loop Monitoring		X
6 Temperature Sensors		X
Static IP Network Support		X
On-Line Reporting		
Secure Login	X	X
Installer Portal	X	X
User Portal	X	X
Historical and Current Data	X	X
Configurable Alerts*	X	X
Interactive Google Maps*	X	X
Predicted vs. Actual Charts*	X	X
Energy Equivalence Display	X	X
Double BTU Calculation*		X
Contribution to Total Energy Chart*		X
Thermal Loop Comparison Chart*		X

* Installer Portal Only

CONTACT

SolarUS, Inc.

www.solarusmfg.com

inquiry@solarusmfg.com

(203) 208-3533